


WIRELESS CONTROLLER

Wireless receiver

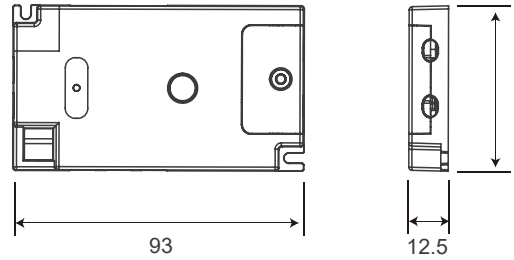

Product Description ▼


- Use with wireless remote control
 1. ON/OFF:
 2. Dimming between 5%-100%
- Use with PIR Sensor
 1. Human-body detection: when people moving in the detection area, light turn on. After the set time, if there is no any motion detecting, light turn off
 2. Delay time: 3min.
- Use with Magnetic collision emitter
 1. When open the door, light turn on; when close the door, light turn off
 2. Delay Time: after 10 minutes close, When the door is always open
- Use with IR Sensor
 1. Infrared detection: When open the door, light turn on; when close the door, light turn off
 2. Delay time can be set from 10 sec to 10min.
- Use with Touch Switch
 1. Capacitive Touch Switch: After touching the pad the first time, it turns on, and the second time it turns off.
- 5-year warranty

Safety & EMC Standard ▼

- Safety According to EN 61347-1, EN61347-2-11 and EN61058-1
- EMC According to EN 301489-1/3
- EMS According to EN 61000-3-2, EN 61000-3-3, EN 61547
- RF According to EN 300440

Product Installation ▼

- Receiver with surface mounting.

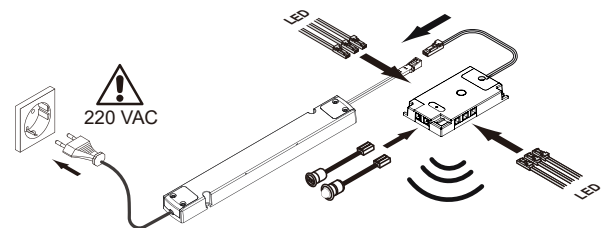

Technic Data ▼

Item code	Rated input	Power	Rated Current	Angle	Detection Range (Depend on sensor)	Operating Frequency	ta	tc	Size (L×W×H)	Approval
HJK120-24VFM	12/24 VDC	60/120W	5A	-	1-3m@PIR, 4-12cm@IR	2.4G	-20...+50°C	60°C	93×53×12.5	CE

* Max. detection range: 15m. (Test data is based on open environment.)

