





LINEAR LIGHT INNER 2

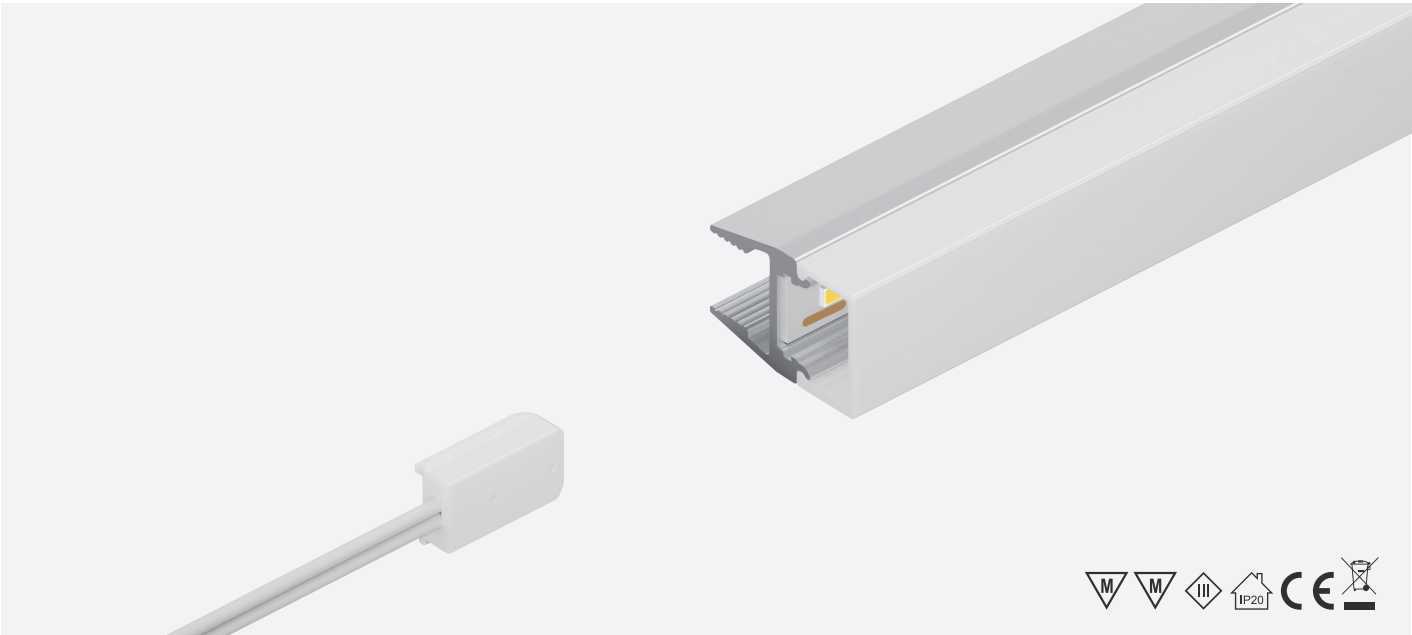

Feature

- Applied to glass back board lit up.
- Edge-lit for smooth illumination.
- Cut-free & smooth continuous lighting.
- Quick connection from input cable.

Luminous Intensity



Specifications

Item	Length	Rated Input	Power	CCT	Lumen	RA	IP	Beam angle
HJL22-008L-02	Max.3000mm	24V DC	10 W/m	3000K	80 lm/m	>90	20	130°

Installation & Dimensions: (mm)

