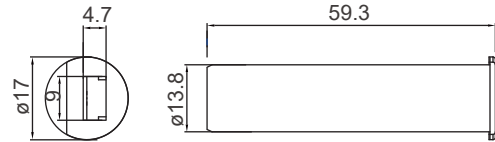


TOUCHLESS CONTROLLER
 IR sensor controller

Product Description


- Infrared detection: When open the door, light turn on; when close the door, light turn off
- Wave control function: Wave hand first time, switch light on; wave hand second time, switch light off; wave hand third time, switch light on again (and so on...)
- Detection range: 5-10mm is recommended
- LED load power: 12V:Max.36W 24V:Max.72W
- 5-year warranty

Safety & EMC Standard

- Safety According to EN 61347-1, EN61347-2-11 and EN61058-1
- EMC According to EN 301489-1/3
- RF According to EN 300440

Product Installation

- Installation: Recessed and surface mounted
- Recessed in mounted: hole Opening Diameter: $\varnothing 14 \times 59\text{mm}$

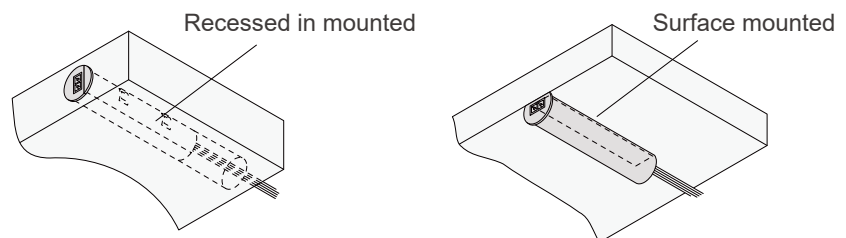
Technic Data

| Item code | Rated input | Power | Rated Current | Angle | Detection Range (Depend on sensor) | Delay Time | ta | tc | Size (L×W×H) | Approval |
|---------------|-------------|--------|---------------|-------|------------------------------------|------------|-------------|------|--------------|----------|
| HJK72-24VGI-1 | 12/24 VDC | 36/72W | 3A | - | 5-10cm | - | -20...+50°C | 60°C | 59.3×17×17 | CE |

